

Versatility



HAWE push-off trailers feature a strongly-built sheet steel body which is capable of withstanding high stresses. The bulkhead is

operated by its own on-board hydraulics which are actuated by an electro-hydraulic remote control system. Two models are

available with a capacity of 40 or 50 cubic metres.



HAWE CSW 4000 with tandem running gear and hydraulic suspension, incl. lift axle and self-steering.



HAWE CSW 5000 with tridem running gear and parabolic suspension with self-steering for the first and third axle. Positive steering is available as an option.




... with high pushing power



Clear overview

The driver has an excellent view of the hydraulically operated bulkhead and operates the CSW via the user-friendly electro-hydraulic controls. All the hydraulic drives are actuated by the on-board hydraulics which are fitted as standard and powered by a drive shaft.

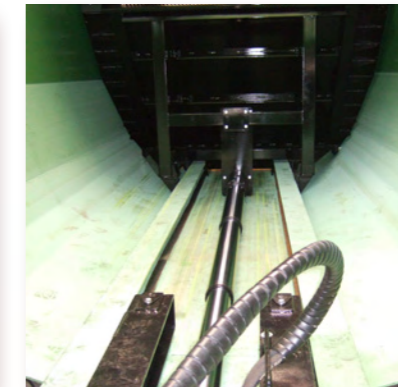

The bulkhead is operated by a multi-stage telescopic ram. The HAWE CSW experiences very little wear because moving parts are reduced to a minimum.



Large tailgate with safely mounted rear lights.



High capacity gives outstanding performance in the silage-making chain. The carrying capacity can be increased by compressing the load.



Hydraulic parking stand and hydraulic drawbar suspension.



Excellent stability for unloading. The HAWE CSW is very stable even when unloading on side slopes and in low buildings where headroom is limited.

